

5 Technical Specifications

<i>Lift Table Type</i> <i>Article number</i>	<i>HS 600 FH</i> <i>193.100.00</i>	<i>HS 600 AH</i> <i>193.100.00 + 200.350.00</i>
Special feature	foot-hydraulic height adjustment	battery-hydraulic height adjustment
Table top	none (option)	none (option)
Support frame dimensions ¹	1900 x 740 mm	1900 x 740 mm
Total height ²	1010 mm	1010 mm
Effective stroke	610 mm	610 mm
Height (without table top)	400 mm	400 mm
Height adjustment	hydraulically	hydraulically
Control element for height	foot pedal	push button unit (removable)
Movable castors	4 pieces (∅ = 125 mm)	4 pieces (∅ = 125 mm)
Parking brakes	2 pieces (longitudinally mounted)	2 pieces (longitudinally mounted)
Load capacity / lifting capacity	max. 600 kg	max. 600 kg
Total stroke reached after	approx. 100 pumping operations	approx. 7 s Key actuation
Net weight ²	approx. 170 kg	approx. 215 kg
Hydraulic power units	1 x lateral	1 x lateral
Battery technology	-	Lead gel, maintenance-free
Battery output voltage	-	12 VDC
Battery capacity	-	26 Ah
Battery operating temperature	-	-15 ... +40° C
Battery charger manufacturer	-	CTEK (manual see ⇒ 0)
Battery charger connection	-	230 VAC / 50 Hz (European standard connector)

5.1 Manufacturer and Nameplate

Manufacturer:

Reinhold Beck Maschinenbau GmbH
Im Grund 23
DE-72505 Krauchenwies (Germany)
Phone: +49 (0) 7576 / 962 978 - 0
Fax: +49 (0) 7576 / 962 978 - 90
Email: info@beck-maschinenbau.de

Nameplate:

The nameplate provides information about the characteristic values of your lift table:

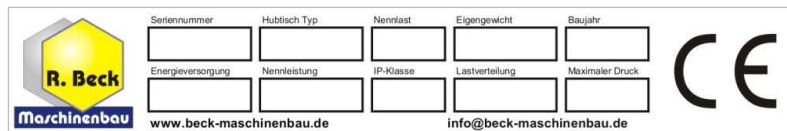


Figure 2: Nameplate

Note: Before using the unit in a way that deviates from the described suitability (see section ⇒ 4.2), it is essential to consult the manufacturer. Otherwise all warranty, liability and other claims for damages of the operator against the manufacturer will be voided!

¹ Frame construction without table top (optionally available table tops are larger, see section ⇒ 16).

² Specification refers to the basic model without optional table top.